


Compact Msw 9 IN A/P TV

SWP908TS SWP912TS

SWP916TS SWP924TS

SWP932TS

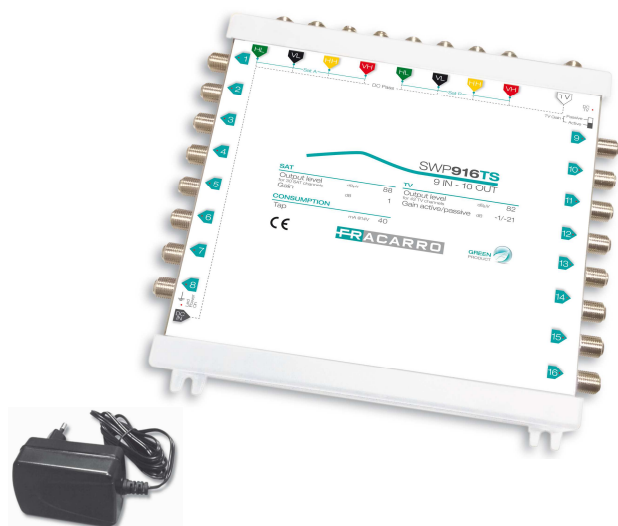

The **SWP9xxTS Serie** belongs to the **compact** multiswitch range with **9 inputs** (8 satellite polarities and TV); it was designed to fulfil every installation requirement in small and medium distribution systems.

The product ensures high quality in a **compact size**, its inputs are distinguished by different **colours** to make the cable connection faster and easier.


The serie is composed by 5 products: **9 inputs with 8, 12, 16, 24 and 32 output taps**; each port has a **LED** which shows the correct reception of the STB DiSEqC command.

The product can be used with **SWA930TS** amplifier, which allows to adjust appropriately the satellite and TV gains.

Characteristics

- **Dip switch** to select TV gain active and passive
- **Return channel** included when TV gain is passive
- Satellite bandwidth up to **2300MHz**
- **High output level**
- **Standalone power supply** for easier installation; it provides the required voltage to the LNB
- Easy to install thanks to **standard colour coding**
- **Low cost**
- **Compact size**

| | | SWP908TS | SWP912TS | SWP916TS | SWP924TS | SWP932TS |
|---------------------------|--------------|--------------------------------------|------------|------------|------------|------------|
| Fracarro Code | | 287350 | 287351 | 287352 | 287353 | 287354 |
| Inputs | | 9 | | | | |
| Outputs | | 8 | 12 | 16 | 24 | 32 |
| Satellite | | | | | | |
| Bandwidth | MHz | 950 - 2300 | | | | |
| Gain | dB | 2 | 1 | 1 | -1 | -2 |
| Uptilt | dB | 4 | | | | |
| Max Output Level (IM3) | dB μ V | 100 | | | | |
| Return Loss | dB | 10 | | | | |
| Terrestrial | | | | | | |
| Bandwidth | MHz | 50 - 862 | | | | |
| Gain Active | dB | 1 | 0 | -1 | -2 | -4 |
| Gain Passive | dB | -19 | -20 | -21 | -22 | -24 |
| Max Output Level (IM3) | dB μ V | 95 | | | | |
| Return Loss | dB | 10 | | | | |
| General Parameters | | | | | | |
| Isolation SAT/SAT TV/SAT | dB | 30 | | | | |
| Standard | V, KHz | 14/18 0/22 - DiSEqC 2.0 | | | | |
| Tap Consumption | mA | 50 | | | | |
| DC Plug | mm | 2.1x5.5x12 | | | | |
| | pol | internal positive, external negative | | | | |
| Max current to LNB | mA | 1500 | | | | |
| Dimensions | mm | 110x190x40 | 170x190x40 | 170x190x40 | 230x190x40 | 300x190x40 |
| Operating Temperature | $^{\circ}$ C | -20 \div 60 | | | | |

| PSU1315TS | | |
|-----------------------|--------------|--|
| Fracarro Code | | 287375 |
| Output Voltage | V | 13 |
| Output Current | mA | 1500 |
| Main Voltage | V, Hz | 120-240, 50-60 |
| Isolation | Classe | II |
| DC Plug | mm | 2.1x5.5x12 |
| | pol |  internal positive, external negative |
| Dimensions | mm | 90 x 70 x 45 |
| Operating Temperature | $^{\circ}$ C | 0 \div 40 |

| Code | Item | Packaging | Quantity | Dimensions | Net Weight | Weight |
|--------|-----------|-----------|----------|------------|------------|--------|
| | | | pcs | mm | kg | kg |
| 287350 | SWP908TS | Single | 1 | 255x245x55 | 0.8 | 0.8 |
| 287351 | SWP912TS | Single | 1 | 330x245x55 | 1.1 | 1.1 |
| 287352 | SWP916TS | Single | 1 | 330x245x55 | 1.1 | 1.1 |
| 287353 | SWP924TS | Single | 1 | 390x255x50 | 1.2 | 1.2 |
| 287354 | SWP932TS | Single | 1 | 390x255x50 | 1.4 | 1.4 |
| 287375 | PSU1315TS | Single | 1 | 100x50x70 | 0.16 | 0.16 |

Installation Example

