

# Barcom Skylink Distribution AB



## MYM

### MyM-3S Micro Master


MyM är den perfekta, kompakta och kostnadseffektiva lösningen för BRF, mindre hotell och liknande, där man vill distribuera upp till 12 analoga kanaler i TV-nätet.

MyM-3S tar emot 3 DVB-S/S2 program, gör om dessa till analoga och dekrypterar om det behövs. Lätt att programmera och uppdatera via webgränssnitt. Monteras enkelt på vägg.

#### egenskaper

- 2 x DVB-S/S2 tuners
- 3 x MPEG2/MPEG4 avkodning (SD)
- 2 x Common Interface (för 2 kanaler resp. 1 kanal)
- 3 x Analoga RF-modulatorer med Nicam och A2 stereo
- 12V drift (separat nätadapter) med låg förbrukning

Se baksidan för tekniska data.

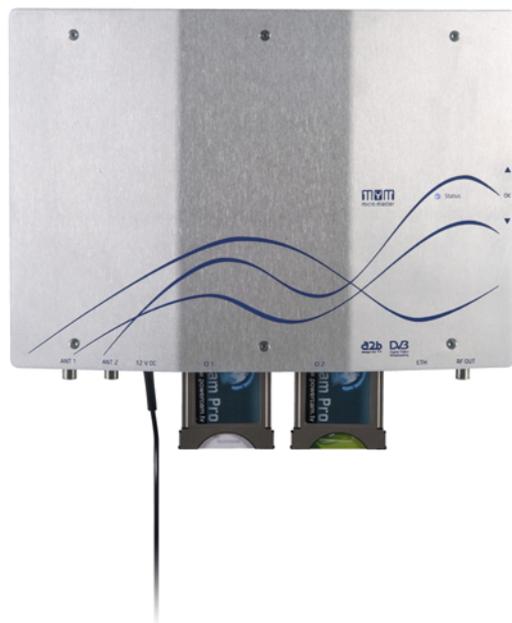

design for TV



## Technical specification

(This specification may be subject to change without notice).

### 2 x DVB-S/S2 Satellite Receiver

Input frequency	950 - 2150 MHz
Symbol rate	1-45 Msymbols/s
Connectors	Type F female, 75 Ω
Input level	-65 to -25 dBm
LNB voltage	Auto, off or 13/18V
LNB current	200 mA per input
22kHz to LNB	Auto, on or off
FEC	Auto

### 3 x MPEG Decoder – Video - audio

Video standard	MPEG2 MP@ML H.264/ MPEG-4 AVC MP@L3
Audio standard	AAC HE or MPEG 1 layer II AC-3 (option)
Picture aspect ratio	Letterbox, Anamorphic
Teletext	VBI
Subtitling	Teletext or DVB subtitling

### 3 x Modulator


Modulation standard	PAL B/G, I, D/K, SECAM (DSB)
Audio	FM-mono, NICAM stereo and A2/A2* stereo
Output channels	Double side band, range 160 – 862 MHz.
Output level	Typ. 80 dBμV, fixed
Built-in aerial amplifier	5 dB
RF output connector	Type F female, 75 Ω

### Decryption

Decryption Interface	2 x Common Interface (PCMCIA 5VDC)
Decryption type	Single or Multidecryption (for output channel 1 & 2)

### Miscellaneous

AC Power supply	230 VAC typ (94-264VAC)
AC power consumption	Typ. 18 W ex. LNB load
DC input voltage	12 VDC +/- 10%
DC power consumption	Typ. 15 W ex. LNB load
Ethernet port	Setup and software update
Setup	Web based GUI
Dimension	301x215x53 mm (excl. connectors)
Weight	Approx. 900 g
Operating temperature	-20 to +45°C non condensing

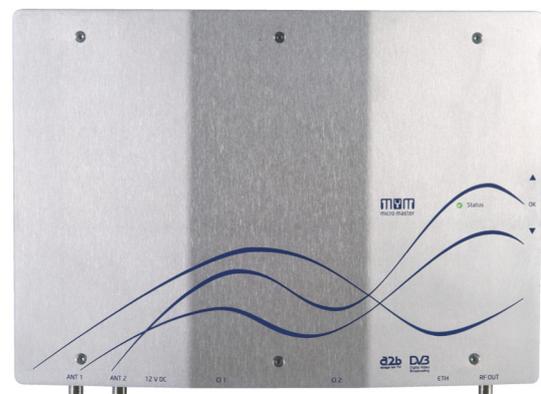

# Barcom Skylink Distribution AB